

Regulations

Fuel Cells

Latest R&D news

Road to 2050

The Carbon Capture Technical Journal

*Unveiling the decarbonization solutions for the shipping industry
to approach the challenges of 2030 and 2050.*

Issue 01 / 2022

ECOSPRAY
technologies for the planet

Road to 2050

The Carbon Capture Technical Journal

The 2050 horizon

Decarbonization is undoubtedly the most imperative priority in the maritime industry and, at the same time, it represents a crucial opportunity. The latest technologies, environmental awareness, sustainability and regulations are the key drivers towards carbon neutrality.

Ecospray has mapped out its path towards decarbonization with remarkable technologies and innovative approaches to achieving the 2050 zero emissions target. Discover all the details in the following pages and follow the progress of our projects.

Preparing for the future

Ecospray is developing a range of different customized technologies to help shipowners find the right solution for decarbonization. One of these, which we have been working on for more than two years in collaboration with universities and research centers, includes CO₂ capture and fuel cell technology.

This unique solution, based on Molten Carbonate Fuel

Cells (MCFC) reduces costs and environmental impact, coupling carbon capture with energy production simultaneously. At the same time, other solutions for carbon capture through chemical adsorption (for example, carbon capture with amines or lime milk) are under development, with the goal of providing different applications based on shipowners' needs.

Carbon capture and storage (CCS) drivers for the marine industry

It is well known that without carbon dioxide capture and storage it will be impossible to keep the global temperature rise below 2C°. However, there are further reasons for the marine industry to start thinking about implementing CCS solutions.

Aside from ensuring compliance with the IMO targets for 2030 and 2050, carbon taxes are likely to appear

and CCS is the best way to avoid a rise in costs.

Not only that, but large-scale investments and subsidization are ongoing (EU and US) to support climate mitigation measures, and CCS is the cheapest method, compared to the switch to renewable fuels that are still very expensive for marine applications.

Challenges for shipowners and shipbuilders

1. Time

Short-term measures that must be complied with starting from 2023.

2. Lack of Clarity

Limits, reduction rates and calculation guidelines are still a work in progress.

3. Complexity

A wide and constantly changing landscape of new fuels and technologies.

A clear vision for the future

We have made a choice for our future. We truly believe that all our technologies for the planet actively support decarbonization and the creation of green power.



Maurizio Archetti

Dealing with an uncertain scenario

IMO set challenging targets for Greenhouse Gas (GHG) emissions from the marine industry, with two major milestones in 2030 and 2050. In terms of applicability, the regulatory framework still requires clarity.

DISCOVER THE IMO TIMELINE



INTERNATIONAL MARITIME ORGANIZATION

Next steps in the IMO roadmap:

- November 2022 - the EEXI survey requirements will take effect
- January 2023 - CII certification coming into effect


To tackle climate change, the IMO has established a series of actions to cut the GHG emissions from shipping. These actions will lead to a reduction in carbon intensity: compared to 2008, the CO₂ emissions will be cut by 40% by 2030, and by 70% by 2050. In addition, by 2050, the goal is to achieve a 50% reduction of the total annual GHG produced. To achieve these goals, vessels will need to significantly reduce their output of carbon dioxide: in the short term, this will be reflected in a significant increase in

vessel efficiency while in the long term this means a move from fossil fuels to alternative fuels, with vessels emitting zero carbon as the target.

The availability of carbon capture technologies will therefore a key role in reaching the targets, both in the short and long term.

The IMO actions to tackle climate change started in 2011 and, in the upcoming decade, additional measures will be introduced ahead of the 2030 target.

IMO GHG targets

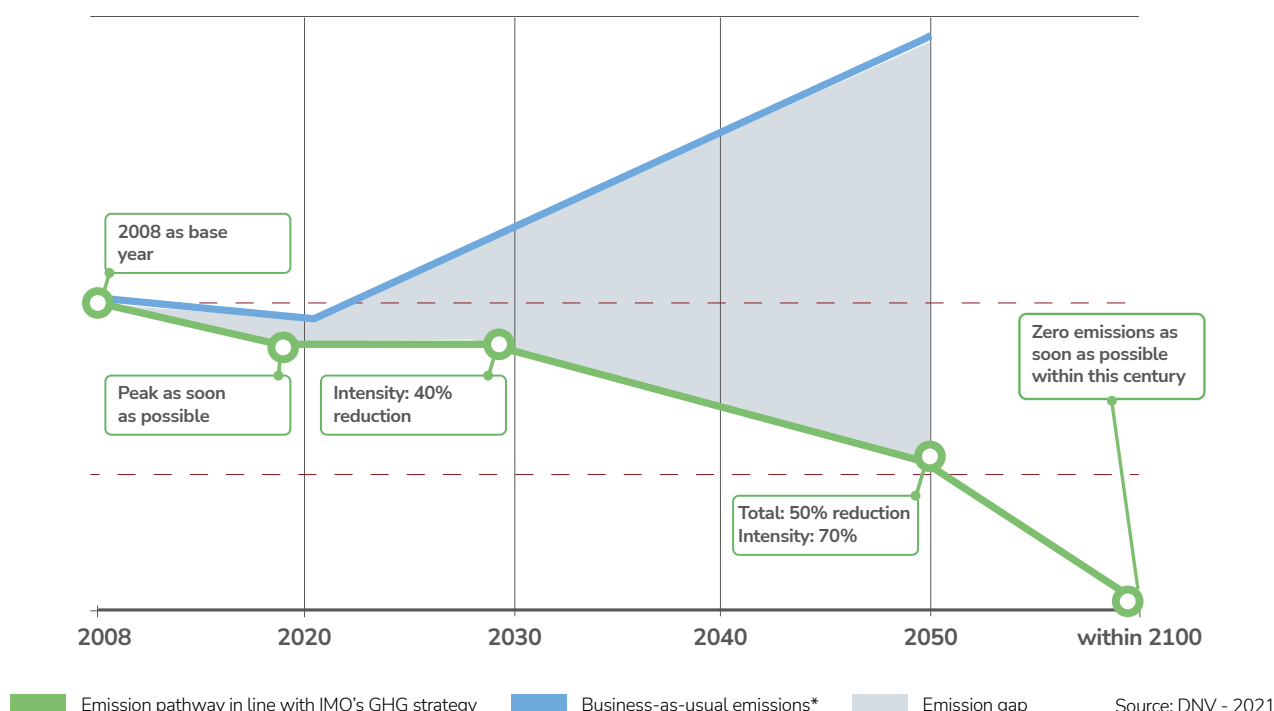

Total: Refers to the total amount of GHG emissions from international shipping. Intensity: Carbon dioxide (CO₂) emitted per ton-mile.

*Note that the business-as-usual emissions are illustrative, and not consistent with the emissions baseline used in our modelling.

The short-term measures aim to achieve a reduction in carbon intensity, one of the initial IMO GHG strategies. This will be done by requiring all ships to calculate their Energy Efficiency Existing Ship Index (EEXI) following technical measures to improve their energy efficiency, and to establish their annual operational carbon intensity indicator (CII) and CII rating; the CII determines the annual reduction factor needed to ensure continuous improvement of the ship's operational carbon intensity within a specific rating

level. However, there are many things a ship can do to improve its rating through various measures, such as hull cleaning; installation of hull appendages to improve overall efficiency of the hull movement through the sea water and adoption of air bubble lubrication systems in order to reduce drag; speed and routing optimization; installation of low energy light bulbs; installation of solar/wind auxiliary power for accommodation services and so on.

EEXI improvement measures

Description	Power limitation (% rel. to MCR)	Ship speed loss (% rel. to V_S)	Ship speed loss (%)
Engine power limitation	up to 50	-21	-37
Description	SFOC improvement (%)	Different C_F (%)	EEXI Improvement (%)
Fuel change from MDO to LNG	10	15	25
Description	Power reduction (% rel. to P_{ME})	Ship speed reduction (% rel. to V_{ref})	EEXI Improvement (%)
Rotor sails (2 units) on Long Range 2 tanker	4		3,8
Installation of shaft generator	6	1,7	5,6
Combination of both installations	10	1,7	9,5
Description	DWT increase (%)	att. EEXI gain (%)	EEXI Improvement (%)
Deadweight increase	5 10	3,7 7,1	1,5 3,0
Description	Power reduction (% rel. to P)	Ship speed reduction (% rel. to V_{ref})	EEXI Improvement (%)
Energy saving device (e.g. PBCF, duct)	1 4 7 10	0,3 1,4 2,4 3,5	0,3 1,3 2,3 3,3

Source: DNV - 2021

The current range of available measures often involves solutions which are difficult to implement without affecting the operational profile (e.g. EPL, SPL, etc.). Moreover, these can be expensive and technically

challenging, for example when converting to LNG fuel. Other issues to take into account are the deadweight increase which is difficult to achieve, while significant GHG emission reduction is not very effective.

EEXI and CII in short

Attained Energy Efficiency Existing Ship Index (EEXI)

The amendments to MARPOL Annex VI, adopted by Resolution MEPC.328(76) and due to enter into force on 1 November 2022, require new and existing ships of 400 GT with conventional propulsion systems to calculate the Attained EEXI which must be equal to or less than the required EEXI.

The EEXI indicates the energy efficiency of the ship with conventional propulsion systems compared to a baseline. Ships are required to meet a specific required Energy Efficiency Existing Ship Index (EEXI), which is based on a required reduction factor, expressed as a percentage relative to the Energy Efficiency Design Index (EEDI) baseline. The verification of the ship's Attained EEXI, based on an EEXI Technical File, will take place starting from 1 January 2023.

$$\text{Attained EEXI} \leq \text{Required EEXI} = (1-Y/100) \times \text{EEDI Reference line value}$$

Where Y is the reduction factor for the required EEXI compared to EEDI reference line.

In case of non-compliance with the requirement, modifications to the ship must generally be considered, regarding the power of main and auxiliary engines and capacity per reference speed. It is clear that many of those modifications play a significant role in reducing the commercial competitiveness of the ship.

Annual operational Carbon Intensity Indicator (CII) and CII rating

The attained annual operational CII of individual ships is the ratio of the total mass of CO₂ emitted to the total transportation carried out in a given calendar year. This gives a figure of the usage of the ship: the lower the CII, the more virtuous the ship. An operational energy efficiency performance rating should be annually assigned to each ship to which regulation 28 of MARPOL Annex VI applies, based on the deviation of the attained annual operational CII of a ship from the required value. The initial rating thresholds are set using 2019 as a base and will become stricter over time.

$$\text{Required annual operational CII} = (1-Z/100) \times \text{CII}_R$$

Where Z is the annual reduction factor; and CII_R is the reference value.

Fuel Cells

A sustainable approach to reach the 2050 IMO GHG targets

The new generation of Molten Carbonate Fuel Cells (MCFC) combine high efficiency clean power generation and carbon capture in the same equipment. Other advantages of such solutions are negligible pollution and low maintenance as there are no moving parts in the fuel cell. This technology can be also integrated with other Ecospray environmental solutions such as

DeSOx, particle filters, and oxidation catalysts. Molten Carbonate Fuel Cells can be powered by methane (LNG, bio-LNG), hydrogen, ammonia, syngas and other fuels providing the reforming/cracking externally or directly inside the cell. This represents a sustainable and holistic approach to the development and implementation of a new generation of fuel cells.

Molten Carbonate Fuel Cells, Explained

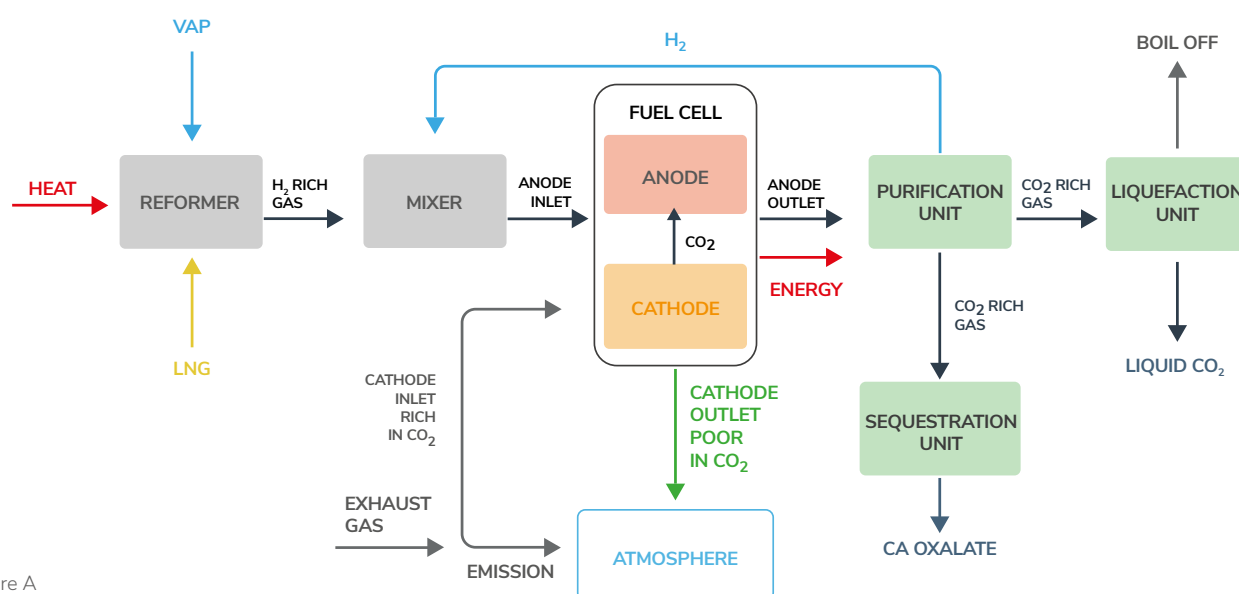


Figure A

Molten Carbonate Fuel Cells (MCFC) are based on a mixture of carbonate salts as electrolytes. The fuel cell needs to operate a high temperature (approx. 600°C) in order to melt the carbonate salt; only in liquid form the salts are capable, by diffusion, of exchanging carbonate ions, thus working as electrolytes.

As for all fuel cells, when activated, there are two basic reactions inside: oxidation at the anode and reduction at the cathode. These two reactions produce electrical current, which is the first key output of the fuel cell.

Specifically, in the MCFC, for the basic reaction to happen, the anode has to be fed with a gas rich in hydrogen, at a high temperature – to melt the carbonate ions and ensure they can work as electrolytes. The hydrogen oxidizes in H⁺ ions. The cathode, meanwhile, has to be fed with CO₂, to prevent the depletion of the carbonate ions formed due to the reduction of the oxygen bonded to CO₂ and migrating from cathode to anode in order to


restore the electrical balance of the system.

When carbonates reach the anode, they react with H⁺ ions forming carbonic acid (H₂CO₃) that then breaks down into CO₂ + H₂O that are released into the outlet gas. This is the second key output and, because of this, the MCFC can conveniently be integrated into a carbon capture process.


Even if MCFC could be directly fed with natural gas, higher efficiencies are achieved with a preliminary reforming of methane to hydrogen. In Figure A, a thermal steam reforming process is shown; this step could integrate catalytic reforming or preferential oxidation of carbon monoxide to carbon dioxide, leading to further production of hydrogen.

Downstream of the fuel cell, residual hydrogen can be recovered, e.g., with membrane separation, and the concentrated CO₂ stream is then liquefied for onboard storage.

On board MCFC applications

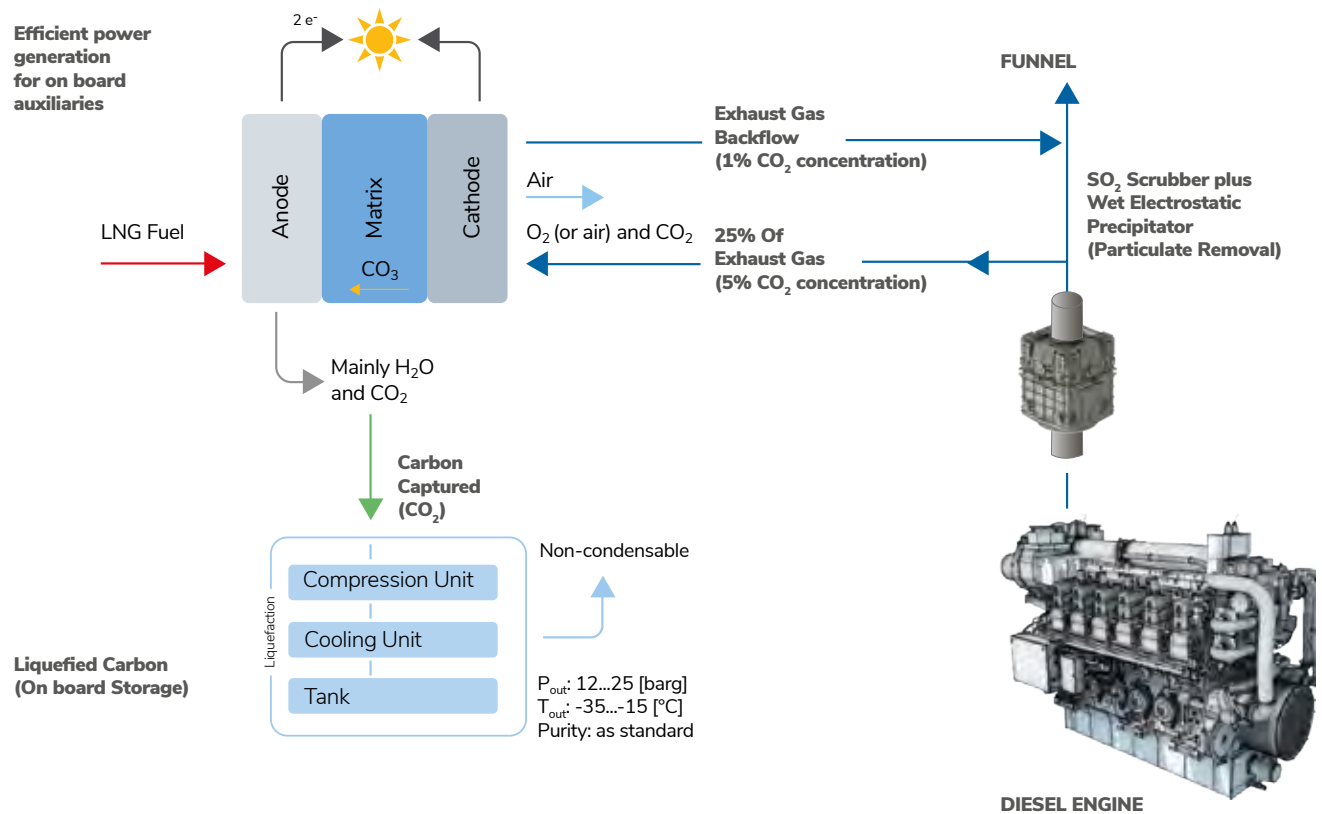

Source: Ecospray

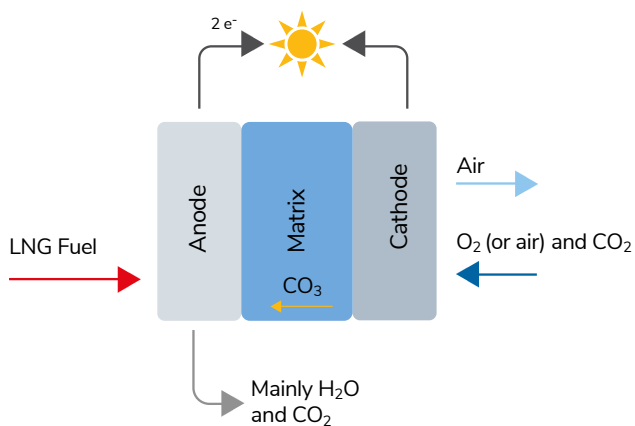

Our new generation of Molten Carbonate Fuel Cells can significantly reduce the ship CO₂ emissions. Several options for the CO₂ storage, onboard and ashore are being studied.

- Operating conditions**



- Cell Voltage: 0.6 – 1 V

- Current: 0-1500 A/m²

- Pressure: 1 – 10 barg

- Operating temperature**

- 600 – 700 oC Electrochemical Reactions



CO₂ Liquefaction

CO₂ liquefaction is a cross-industry application that consists in the liquefaction of CO₂ through several sequestration technologies - biogas upgrading to biomethane systems, bio-LNG/ LNG, MCFC, amine absorption-based CC - into an industrial quality product. This solution supports the circular economy and decarbonization, increasing the sustainability of the entire production cycle with the goal of becoming a “carbon negative” process.

The CO₂ captured from the system is liquefied in a

dedicated purification and liquefaction plant. The raw CO₂ coming into the system is pressurized through a multi-stage compressor and dried with molecular sieves for moisture removal to prevent the formation of ice in the subsequent stages of liquefaction. The compressed gas is then cooled using a heat exchanger and a chiller, and purified with dedicated drums and separators.


The output of the separator is a 99.5% concentrated CO₂, industrial-grade compliant.

Carbon Capture Utilization and Storage


CO₂ liquefaction is one of the options Ecospray can provide. With the standard method, CO₂ is stored as a refrigerated liquid (-40°C) under pressure (15 barg). CO₂ is non-flammable, non-explosive and nontoxic, but due to the asphyxiation risk, precautions must be taken.

While liquefaction of CO₂ is a technology that is already available, other technologies for CO₂ sequestration are being studied. A research project on a low-cost CO₂ sequestration method is being carried out in collaboration with Turin University: this method consists of the use of a green reaction to trap the CO₂ in a stable crystalline phase (weddelite).

Another approach is CO₂ adsorption with lime milk. Lime milk is a suspension of calcium hydroxide in water with a solid content ranging from 10% to 30%. Calcium oxide reacts with CO₂ to form calcium carbonate. Calcium carbonate is only slightly soluble in water, so it will form a solid product. The suspension of calcium carbonate is harmless for the marine environment; indeed, limestone is a constituent of various marine organisms. The possibility of discharging the calcium carbonate suspension overboard is currently under evaluation; this could potentially be easily dissolved by the larger volume of seawater.

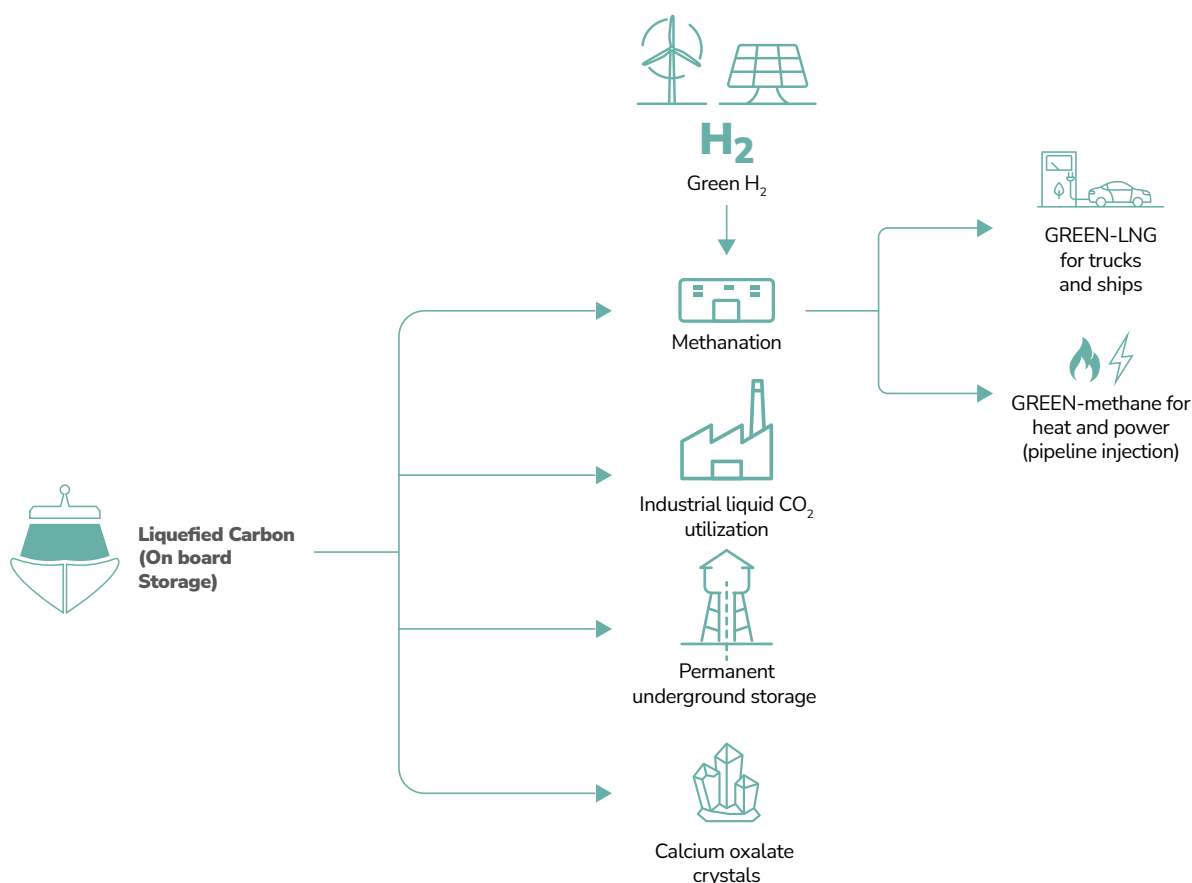

Road to 2050: where are we?

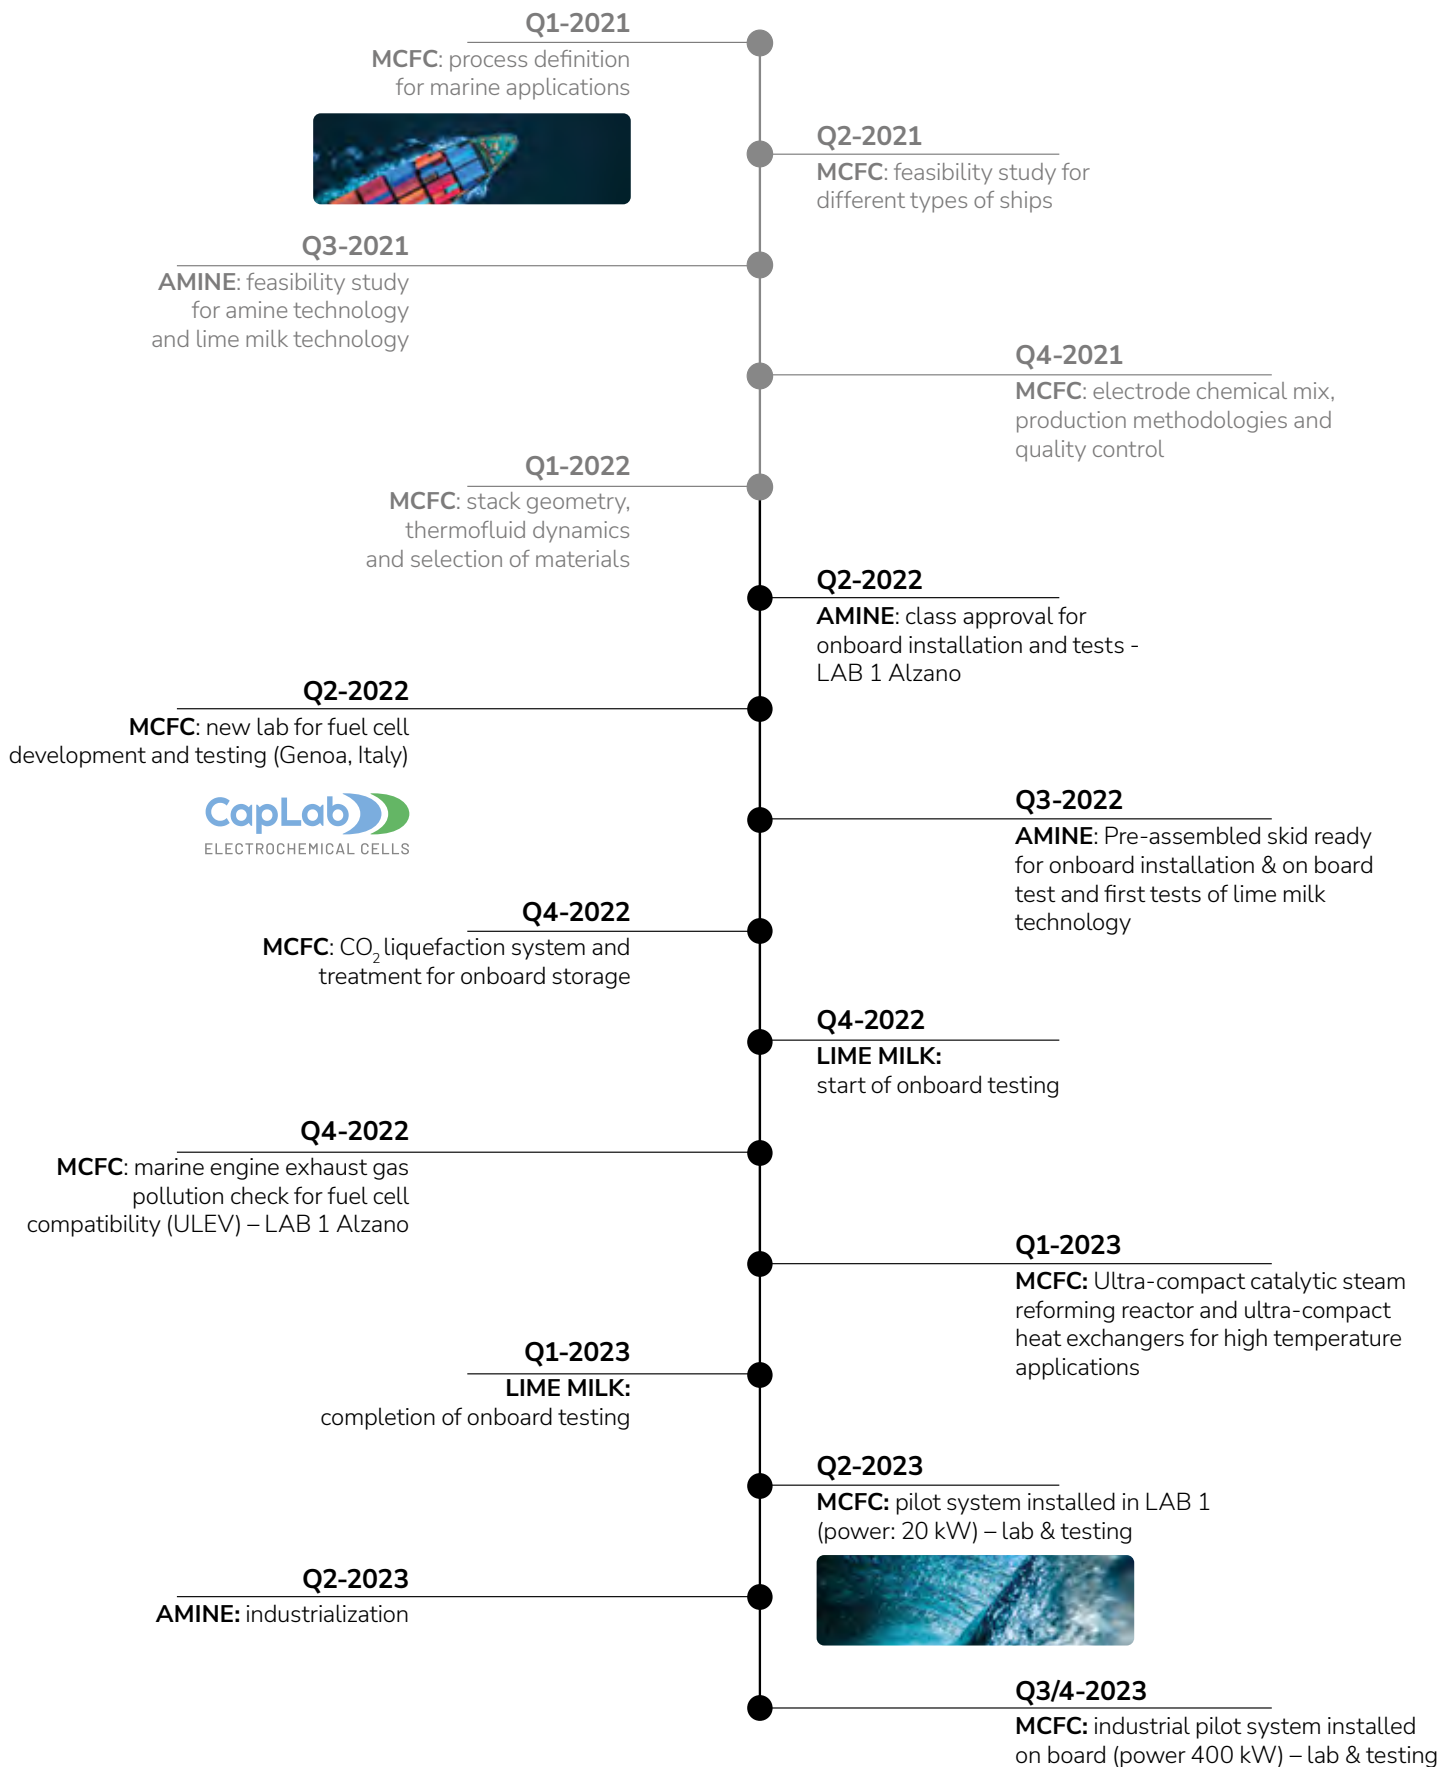

The new CapLab

The CapLab laboratory was established jointly by Ecospray and the Department of Civil, Chemical and Environmental Engineering of the University of Genoa with the aim of developing electrochemical cells for CO₂ capture, the production of energy and the promotion of the hydrogen carrier. The CapLab will be opened in the coming months (in late spring) in Genoa, in the touristic port area.



Single cell testing

The single cell testing phase plays a key role in the MCFC development. In this phase, currently ongoing, different fabrication materials and chemical compositions are studied on a 10x10 cm single-layer cell. The current-voltage curves, resulting from testing, provide the possibility to compare the behaviors and the performance of the single cells with the target to select the most optimal one for the stack production.



Stack geometry study

The fuel cell stack consists of a pile of single cells. The stack also includes bipolar plates, gas headers, seals and end plates, as well as the tensioning system.

The power of a single cell is 0.5 kW; to reach higher power generation, the cells are stacked (300 cells) for a total output of 150 kW.



What's next - coming soon

If MCFC is considered the right solution for a good number of applications, in certain cases – in light of different ship operational profiles, routes, available infrastructures, etc. – alternative technologies could be applied. For this reason, diverse solutions are under development to cover a wider range of necessities.

Ecospray is fully involved in the study and development of an amine absorption technology for CCS in marine onboard application. This solution is widely used for land-based applications and Ecospray is now working on the marinization of the technology, keeping an eye on monitoring the reduction in energy consumption.

CO₂ is absorbed by the amine solution and, during the process, the amine solution is regenerated by stripping the CO₂ out of it. Once separated, the CO₂ is then liquefied and stored in specific cryogenic tanks onboard.



Source: Ecospray

An aerial photograph showing a wide, dry riverbed with a light brown, sandy texture. The riverbed is flanked by dense green forests. Several small, dark pools of water are scattered throughout the dry bed, and a few thin, winding streams of water are visible. The sky above is blue with scattered white clouds. The text "Are you ready for 2050?" is overlaid in the center in a large, white, sans-serif font.

**Are you ready
for 2050?**



Choose a side. The right one.

The time is now

We are fully committed to support our clients in the decarbonization of transportation by land and sea, towards a true energy transition.

The use of carbon-neutral biofuels becomes possible with our microscale systems for biomethane liquefaction and CO₂ recovery.



Discover our solutions
for a faster passage
to decarbonization



In the next issue:
“An in-depth look at amine technology”

ECOSPRAY
technologies for the planet

Via Circonvallazione, 14/14A
15050 Alzano Scrivia (AL) Italy
+39 0131 854611
marine@ecospray.eu
ecospray.eu
